

AEDC-TR-66-224

**ARCHIVE COPY  
DO NOT LOAN**

cy 1

## **BUCKLING OF HEADS, CYLINDERS, AND RINGS**

Kenneth P. Buchert

ARO, Inc.

December 1966

Distribution of this document is unlimited.

**AEROSPACE ENVIRONMENTAL FACILITY  
ARNOLD ENGINEERING DEVELOPMENT CENTER  
AIR FORCE SYSTEMS COMMAND  
ARNOLD AIR FORCE STATION, TENNESSEE**

AEDC TECHNICAL LIBRARY



PROPERTY OF U. S. AIR FORCE  
AEDC LIBRARY  
AF 40(600)1200

# ***NOTICES***

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

## BUCKLING OF HEADS, CYLINDERS, AND RINGS

Kenneth P. Buchert \*

ARO, Inc.

Distribution of this document is unlimited.

---

\*Participant in the Summer Faculty Program, ARO, Inc., and Professor at the University of Missouri, Columbia, Missouri.

## FOREWORD

The research reported herein was sponsored by Headquarters, Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC), Arnold Air Force Station, Tennessee, under Program Element 65402234.

The results of research were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the AEDC under Contract AF 40(600)-1200. The research was conducted under ARO Project No. ST8002, and the manuscript was submitted for publication on October 12, 1966.

This technical report has been reviewed and is approved.

F. N. Price  
Lt Col, USAF  
AF Representative, AEF  
Directorate of Test

Leonard T. Glaser  
Colonel, USAF  
Director of Test

## ABSTRACT

The purpose of this report is to briefly review and summarize the research that has been accomplished on the buckling of shells and to develop practical methods of stability analyses that are applicable to large fabricated shell construction. The analyses are applicable to doubly curved shells (i. e. , spheres, ellipsoids, dished heads, etc.), to stiffened and unstiffened cylinders, and to rings. Although the methods presented were specifically developed in the analysis of the Mark I - Aerospace Environmental Facility, Arnold Engineering Development Center, Arnold Air Force Station, Tennessee, they may be used to analyze the general class of shells constructed by the "Heavy Plate Fabricators". This general type of shell is fabricated in steel or aluminum, is relatively thick, has a relatively large radius of curvature, and is fabricated generally in accordance with the ASME-Section VIII-Unfired Pressure Vessel Code. Although the loading is basically caused by external pressure, such loadings as temperature variations and concentrated loads and moments are considered. The important effects of fabrication tolerances are also considered in the analyses.

## CONTENTS

	<u>Page</u>
ABSTRACT. . . . .	iii
I. INTRODUCTION . . . . .	1
II. GENERAL COMMENTS ON BUCKLING. . . . .	1
III. HEAD BUCKLING EQUATIONS. . . . .	4
IV. CYLINDER BUCKLING EQUATIONS . . . . .	6
V. RING BUCKLING EQUATIONS . . . . .	7
VI. GENERAL COMMENTS ON DEFLECTIONS DUE TO CONCENTRATED LOADS . . . . .	8
REFERENCES . . . . .	9
BIBLIOGRAPHY . . . . .	9

## ILLUSTRATIONS

### Figure

1.	Coefficient $\alpha$ as a Function of $\frac{\Delta}{t}$ . . . . .	11
2.	Coefficient $\beta$ as a Function of $\frac{UR}{t}$ . . . . .	12
3.	Coefficient $k_p$ as a Function of $Z_L$ . . . . .	13

## SECTION I INTRODUCTION

The sections of this report give the recommended methods for the stability analyses of doubly curved shells, stiffened cylindrical shells, and rings. The general procedure is as follows:

1. Determine the deviations from a geometrically perfect surface caused by construction methods, temperature variations, concentrated loads, and other effects.
2. Substitute the results of Step 1 above into the appropriate buckling equation.
3. Calculate the factor of safety by dividing the calculated or allowable pressure by the operating pressure.

The state-of-the-art of the analyses of the stability of shell structures leaves much to be desired. Based upon previous experience, it is recommended that, if at all possible, factors of safety of two or more should be provided for any given operating or emergency condition. It must be remembered that such factors as residual stresses do have an important effect on buckling but have not been included in the calculations.

## SECTION II GENERAL COMMENTS ON BUCKLING

Although shell structures subjected to external pressure-type loadings have been built for several thousand years, the present state-of-the-art of analysis leaves much to be desired. The stress distribution in shells can often be handled with confidence and reliability by using well developed equations and digital computers. Such is not the case for the buckling problem. Ample evidence is available (such as the failures of the NASA-Environmental Chamber at Houston, the 340-ft dome in Bucharest, the common bulkhead of the Saturn SIVB, and the 300-ft dome in Fargo) to illustrate the difficulties encountered by the engineer in designing an external pressure-type structure. The pioneers in the field of elastic-plastic stability are reviewing and continually changing the basic concepts of buckling, as well as the mathematical techniques, in an attempt to correlate theories and practice. Considerable progress has been made in the last five years in the development of new theories and in the explanation of previous seemingly inconsistent laboratory and field results. The work at Cal Tech, Harvard, Florida, Stanford, and NASA-Langley on cylinders and the work at Missouri, MIT, Cal Tech, the Navy-David Taylor Model Basin, and the Army-Watertown Materials

Research Agency on spheres have added to our knowledge of the physics of the buckling process. However, almost every investigator and engineer in the field agrees that there is not a reliable, prudent method of analysis available that will ensure the success of a design without the use of a relatively high factor of safety.

It is therefore recommended that only a reasonable amount of time and expense be devoted to the calculations of deflections, stresses, etc., for use in the buckling equations presented herein. Calculations accurate to, say  $\pm 25$  percent are sufficient for the buckling analysis, since to spend the effort for greater accuracy is to neglect the crux of the problem. It should be noted that the ductility of the material has allowed many marginal designs, when stress is the important parameter, to function without visible signs of distress. Unfortunately, marginal designs when buckling is important are usually readily visible to all in that failure usually occurs.

The great majority of research in the shell stability or buckling field has been done on the spherical segment subjected to external pressure and on the cylinder subjected to axial compression (note: the practical application of the cylinder usually includes axial compression because of the end thrust on the vessel). The general comments enumerated above apply to both of these problems. It is quite interesting to note that the "classical-linear-solutions", developed about a half century ago, to both these problems are identical, i. e. ,

$$\sigma_{cr} = \frac{E}{\sqrt{3(1-\nu^2)}} \left( \frac{t}{R} \right) \quad (1)$$

Where

$\sigma_{cr}$  - is the critical buckling stress

E - is the modulus of elasticity

t - is the shell thickness

R - is the radius of curvature

$\nu$  - is Poisson's ratio

Most experimental results and field failures for both spheres and cylinders indicate a buckling stress of about one-third to one-fourth of this theoretical value. The theory indicates in both cases that the buckle wavelength is relatively short. Experiments indicate that the buckle wavelength is considerably longer than that given by the theory (Ref. 1). This fact has been used in the design of stiffened cylindrical shells for a number of years.



The use of stiffeners to reduce the unstiffened shell wavelength of buckle and thus raise the buckling load has been used on the Mark I Chamber and, of course, has been used on the large ducting in most of the AEDC facilities. The use of rings to reduce the unstiffened shell buckle wavelength of cylinders is similar in many respects to reducing and effective length of a column and thus raising its buckling load. This same technique has been developed at the University of Missouri for spheres and other doubly curved surfaces. A number of full scale structures have been built using this technique.

Recently developed large deflection theories of buckling have brought stress or pressure closer together. Considerable research has been done on factors that significantly influence the buckling loads which do not appear in Eq. (1). These factors include the following:

1. Imperfections: Obviously, it is impossible to make a geometrically perfect shell. In fact, the ASME Code allows considerable variations from a perfect shell in order to minimize cost. Certain kinds of imperfections (deviations from a perfect surface) may reduce the buckling load. Some types of imperfections have little effect on the buckling load.
2. Edge Conditions: Recent tests and theoretical studies indicate that edge conditions greatly influence the buckling load. Unfavorable edge conditions have been shown experimentally and theoretically to influence the buckling load by factors of three or more. Although the qualitative effects are known, no detailed theoretical method is available to quantitatively evaluate the effect of edge conditions on all ASME Code-type shells. It should be pointed out that, given the freedom of choice, the designer can often with little effort design a shell whose edges are not critical in determining the buckling load.
3. Yield Strength or Pseudo-Elastic Effects: It is well known that yield stress is an important parameter in column buckling. The AISC specification uses the yield strength as one of the parameters in determining the load carrying capacity of a column.

Since experiments on shells seem to confirm that buckling is a large deflection and a relatively large wavelength process, it would appear that yield strength of the material is a factor in shell buckling. As deflections become large, stresses increase and in many practical cases reach the yield strength of the material during buckling. Numerous investigators

have shown that yield strength is important in cylindrical shell buckling. Tests at the University of Missouri indicate that the same is true for spheres.

After a careful review of the details of the Mark I design and the available theory on cylinders and spheres, it is recommended that the critical buckling loads be determined on the basis of a deflection-allowable pressure analysis. The method recommended is as follows. The deviations from a perfect surface are determined. These deviations include the fabrication tolerances, the deflections caused by temperature variations, and the deflections caused by concentrated loads, edge conditions, etc. Based on the total deviations or deflections, the allowable external pressure loading is determined from available theory. It is recommended that Donnell's and Wan's (Ref. 1) theory be used on the cylindrical shells and the writer's theories (Ref. 2) be used on the heads. These theories are modified as indicated later in this report to take into account the various parameters indicated above and to provide the engineer with a usable tool.

The method of comparing the allowable buckling stress to the actual stresses that exist under all loading conditions was eliminated after careful consideration. There were many reasons for the decision. One example can be cited as to the very unconservative nature of this type of calculation. In the case of temperature effects on buckling, one can calculate reductions in stress caused by temperature decreases which would indicate an increase in the factor of safety under external pressure. However, the deflections caused by the temperature decrease could be high enough to significantly decrease the factor of safety. Similar effects would be present when considering erection tolerances and residual welding stresses and distortions.

### SECTION III HEAD BUCKLING EQUATIONS

The following equation is recommended for finding the critical buckling pressure for heads:

$$p_{cr} = 1.41 \alpha \frac{A}{B}^{\frac{1}{2}} E \left( \frac{t}{R_1} \right)^2 \quad (2)$$

Where  $\alpha$  is a factor determined from Fig. 1,

$$\begin{aligned}
A &= \frac{1}{2} + (C_2 - 1) + (C_2 - 1)^2 + \frac{1}{2}(C_2 - 1)^3 + \frac{1}{10}(C_2 - 1)^4 + \frac{1}{2}\left(\frac{1}{C^2} - 1\right) \\
&+ \frac{4}{3}\left(\frac{1}{C^2} - 1\right)(C_2 - 1) + \frac{3}{2}\left(\frac{1}{C^2} - 1\right)(C_2 - 1)^2 + \frac{4}{5}\left(\frac{1}{C^2} - 1\right)(C_2 - 1)^3 \\
&+ \frac{1}{6}\left(\frac{1}{C^2} - 1\right)(C_2 - 1)^4 + \frac{1}{6}\left(\frac{1}{C^2} - 1\right)^2 + \frac{1}{2}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1) \\
&+ \frac{3}{5}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1)^2 + \frac{1}{3}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1)^3 + \frac{1}{14}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1)^4 \\
B &= \frac{1}{2} + \frac{1}{2}(C_2 - 1) + \frac{1}{6}(C_2 - 1)^2 + \frac{3}{4}\left(\frac{1}{C^2} - 1\right) + \left(\frac{1}{C^2} - 1\right)(C_2 - 1) \\
&+ \frac{3}{8}\left(\frac{1}{C^2} - 1\right)(C_2 - 1)^2 + \frac{1}{2}\left(\frac{1}{C^2} - 1\right)^2 + \frac{3}{4}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1) \\
&+ \frac{3}{10}\left(\frac{1}{C^2} - 1\right)^2(C_2 - 1)^2 + \frac{1}{8}\left(\frac{1}{C^2} - 1\right)^3 + \frac{1}{5}\left(\frac{1}{C^2} - 1\right)^3(C_2 - 1) \\
&+ \frac{1}{12}\left(\frac{1}{C^2} - 1\right)^3(C_2 - 1)^2
\end{aligned}$$

where  $R_1 > R_2$

and  $R_1$  and  $R_2$  = principal radii of curvature

$$C = \frac{R_1}{R_2}$$

$$C_2 = \frac{\beta_2}{\beta_1}$$

$\Delta$  = deviation from a perfect surface

$\beta_1, \beta_2$  = half wave angles of buckle in the principal directions (wavelength divided by two times the radius of curvature)

For a given geometry, all of the quantities will be known except the coefficient  $C_2$  (the ratio of the half wave angles of buckle).

The value of  $C_2 > 0$  is varied until the minimum value of  $\rho_{cr}$  is found. This minimum value of  $\rho_{cr}$  is the buckling pressure.

For an ellipsoidal head

$$R_a = \frac{a^2 b^2}{[a^2 \sin^2 \phi + b^2 \cos^2 \phi]^{3/2}}$$

$$R_b = \frac{a^2}{[a^2 \sin^2 \phi + b^2 \cos^2 \phi]^{1/2}}$$

Where

a = length of semimajor axis

b = length of semiminor axis

$\phi$  = angle between axis of symmetry of head  
and point at which curvature is being  
calculated.

A computer program has been written to determine  $\rho_{cr}$  which greatly reduces the amount of time for the calculations.

If  $\frac{\Delta}{t}$  is small, Eq. (2) reduces to that given in Ref. 2. If  $R_1 = R_2$ , the shell is spherical and Eq. (2) reduces to the well known "von Karman - Tsien" sphere buckling equation. The  $\frac{\Delta}{t}$  correction was originally published by the writer in Ref. 3 in linear form for small  $\frac{\Delta}{t}$  values. It was later extended for larger values of  $\frac{\Delta}{t}$ , as given in Fig. 1. It should be noted that Eq. (2) gives a conservative prediction of the buckling pressure. In calculating  $\frac{\Delta}{t}$ , it is assumed that any kind of deviation from a perfect surface will cause a reduction in the buckling pressure. This is not the case as was demonstrated in Ref. 2. The research on the effects of imperfections has not advanced to the stage such that detailed discriminatory quantitative calculations can be made.

#### SECTION IV CYLINDER BUCKLING EQUATIONS

The following equation is recommended for finding the critical buckling pressure for ring stiffened cylinders.

$$\rho_{cr} = \frac{\beta k_p \pi^2 E}{12(1-\nu^2)} \left(\frac{t}{L}\right)^2 \frac{t}{R} \quad (3)$$

Where

$\beta$  - is a factor determined from Fig. 2

$k_p$  - is a factor determined from Fig. 3

$$\sigma = \frac{pR}{2t}$$

p = operating pressure

$$U = 0.62 \left(\frac{\Delta}{t}\right) \frac{n^2 t^2}{R^2}$$

$$n = 0.45 \sqrt{Rt}$$

$\sigma_y$  = yield stress of the material

$$Z_{11} = \frac{L^2 (1-\nu^2)^{1/2}}{Rt}$$

L = distance between stiffeners

If the imperfections are negligible, Eq. (3) reduces to the equation given in Ref. 4. The reduction factor  $\beta$  was given in Ref. (1) for cylinders under axial compression. The cylinder subject to external pressure is subjected to axial compression and radial pressure. The experimental results for short cylinders under external pressure buckle at pressures considerably below the "classical linear theory" value similar to cylinders under axial compression. Based on the above, it is considered reasonable to use the results shown in Fig. 2. Here again, the results are probably conservative since all imperfections or deflections are considered as reducing the buckling load.

#### SECTION V RING BUCKLING EQUATIONS

The following equation is recommended for finding the critical buckling pressure for stability rings:

$$\sigma_y = \frac{\rho_{cr} L R}{A} + \left[ \frac{\rho_{cr} L \Delta R}{1 - \frac{\rho_{cr} L R^3}{3 E I}} + M_T \right] \frac{c}{I} \quad (4)$$

Where

$\Delta$  - is the deflection of the ring caused by imperfections, loads, temperature gradients, etc.

$M_T$  = the moment caused by a temperature variation

A = the area of the ring

I = the moment of inertia of the ring

c = the distance from the neutral axis of the ring to the outer fiber.

This equation is an extension of the one given by Timoshenko in Ref. 5. The moment of inertia and area of the ring should be calculated assuming an effective area of shell acting with the ring that is physically attached to the shell. The usual assumption is that the effective length of shell is  $1.56 \sqrt{Rt}$ .

It should be emphasized that the primary purpose of the stability rings is to stiffen the cylindrical shell such that the wavelength of buckle of the cylinder will be approximately equal to the distance between stiffeners. Extreme care should be exercised in applying significant extraneous loads on the stability rings.

If the temperature variations are axisymmetric, they do not contribute to the value of  $\Delta$  in Eq. (4) because they are of a constant value. If the temperature variations are not axisymmetric, they do contribute to  $\Delta$ .

## SECTION VI

### GENERAL COMMENTS ON DEFLECTIONS CAUSED BY CONCENTRATED LOADS

The least weight structure is never the least cost structure. As a result, the structure designed and built in general accordance with ASME Code is not the least weight structure. Designers attempt to arrive at structural details that will result in a minimum cost structure. Therefore, the fabrication tolerances are liberal to be consistent with low cost and competitive situations. Usually the part of the value or  $\Delta$  assigned to fabrication tolerances that will be used in the preceding formulas will be relatively large. Since most of the effects of  $\Delta$  on the buckling pressure are non-linear and decrease as  $\Delta$  increases, gross approximations in computing the deflections due to temperature and other load effects will have a relatively small effect on the calculated buckling pressure. This, coupled with the state-of-the-art of the knowledge of the buckling process, allows rather crude approximations for the calculated deflections caused by temperature and other effects.

Typical acceptable approximations might be as follows:

1. An ellipsoidal head may be assumed to be spherical.
2. Edge conditions on heads may be assumed to be simply supported or fixed.
3. Small openings and reinforcing may be neglected.
4. Ring deflection may be neglected compared to shell deflection.
5. Deflections caused by temperature variations may be assumed to be unrestrained. That is, the contribution to  $\Delta$  could be assumed as the coefficient of expansion, times the temperature change, times the length over which the temperature change takes place.

6. Such approximations as given in Roark (Ref. 6) may be used.

The above comments apply to the buckling analysis. Obviously, the approximations cannot be used when the detailed stress distribution is under investigation.

## REFERENCES

1. Donnell, L. H. and Wan, C. C. "Effect of Imperfections on Buckling of Thin Cylinders and Columns Under Axial Compression." Journal of Applied Mechanics, ASME, Volume 17, No. 1, March 1950.
2. Buchert, K. P. "Buckling of Doubly Curved Orthotropic Shells." Engineering Experiment Station, University of Missouri, Columbia, Missouri, November 1965.
3. Buchert, K. D. "Zur Stabilität grosser, doppelt gekrümmter and versteifter Schalen." Der Stahlbau, Heft 2, February 1965.
- 4. Gerard, G. and Becker, H. "Handbook of Structural Stability, Part III - Buckling of Curved Plates and Shells." NACA Technical Note 3783, Washington, August 1957.
5. Timoshenko, S. and Gere, J. M. Theory of Elastic Stability. McGraw-Hill, Second Edition, New York, 1961.
6. Roark, R. J. Formulas for Stress and Strain. McGraw-Hill Co., New York, 1954.

## BIBLIOGRAPHY

The following is a list of selected papers that will give the reader additional background in the subject of shell buckling.

1. Hoff, Nicholas J. "The Perplexing Behavior of Thin Circular Cylindrical Shells in Axial Compression." Stanford University Department of Aeronautics and Astronautics Report SUDAER No. 256, February 1966.
2. Buchert, K. P. "Stability of Doubly Curved Stiffened Shells." Ph D Dissertation, University of Missouri, January 1964.

3. von Kármán, T. and Tsien, H. S. "The Buckling of Spherical Shells by External Pressure." Journal of the Aeronautical Sciences, Vol. 7, No. 2, 1939.
4. Krenzke, A. and Kiernan, T. J. "The Effect of Initial Imperfections on the Collapse Strength of Deep Spherical Shells." Department of the Navy, David Taylor Model Basin, Report 1757, February 1965.
- 5. "Collected Papers on Instability of Shell Structures-1962." NASA-Langley Research Center, NASA TN D-1510, December 1962.
- 6. Adachi, Jiro. "Measurements of Displacements of Spherical Caps during Snap-Through Buckling." U. S. Army Materials Research Agency, Watertown, Massachusetts, Technical Report AMRA TR 66-03, January 1966.
- 7. Goerner, E. "Buckling Characteristics of Spherical or Spherically-Dished Shells." Redstone Arsenal, Army Ballistic Missile Agency, Report IR9, February 1956.
8. Zick, L. P. and Carlson, C. E. "Vacuum Test of Sphere to Failure." The Water Tower, Chicago Bridge & Iron Co., November 1947.
9. Bart, R. "An Experimental Study of the Strength of Standard Flanged and Dished and Ellipsoidal Heads Convex to Pressure." Journal of Engineering for Industry, May 1964.
- 10. Loo, T. and Evan-Iwanowski, R. M. "Interaction of Critical Pressures and Critical Concentrated Loads Acting on Shallow Spherical Shells." Journal of Applied Mechanics, 65-WA/APM-27.
11. Haas, A. M. Design of the Concrete Shells. John Wiley and Sons, New York.



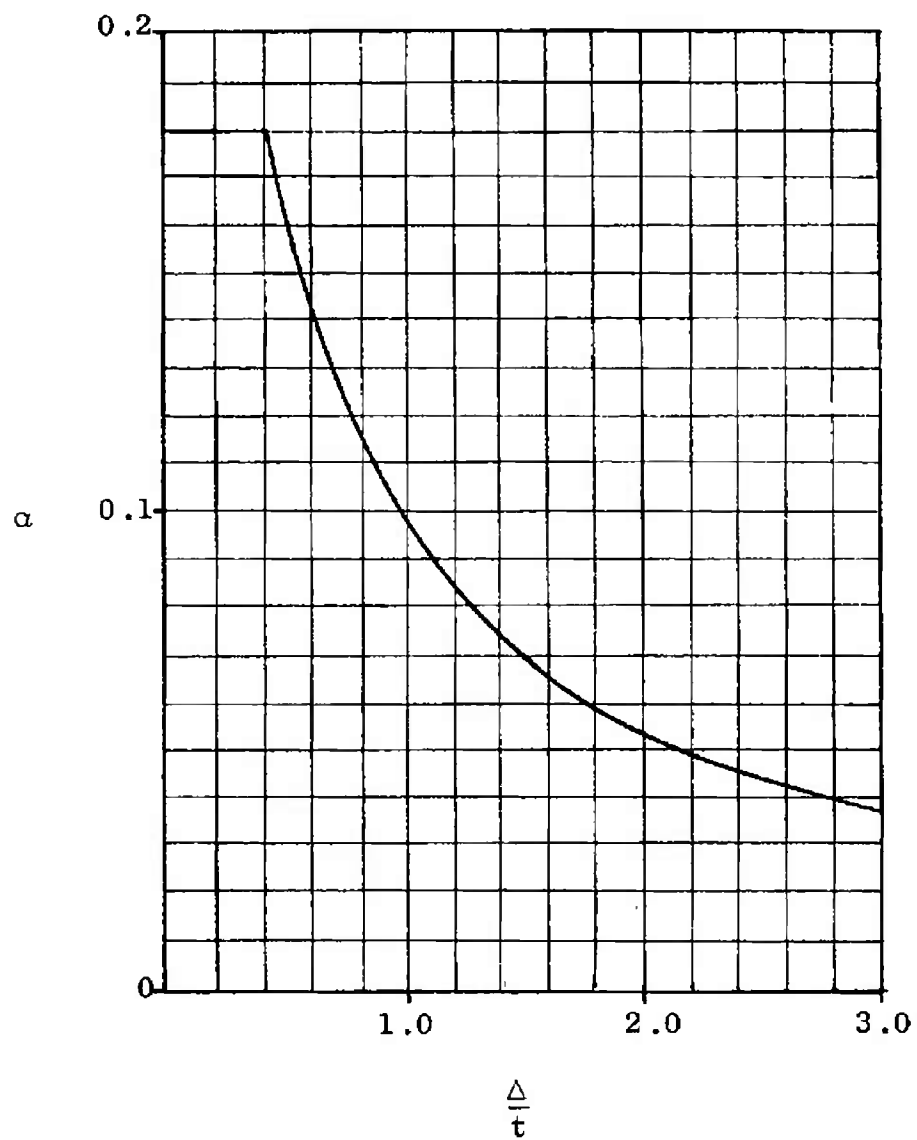


Fig. 1 Coefficient  $\alpha$  as a Function of  $\frac{\Delta}{t}$

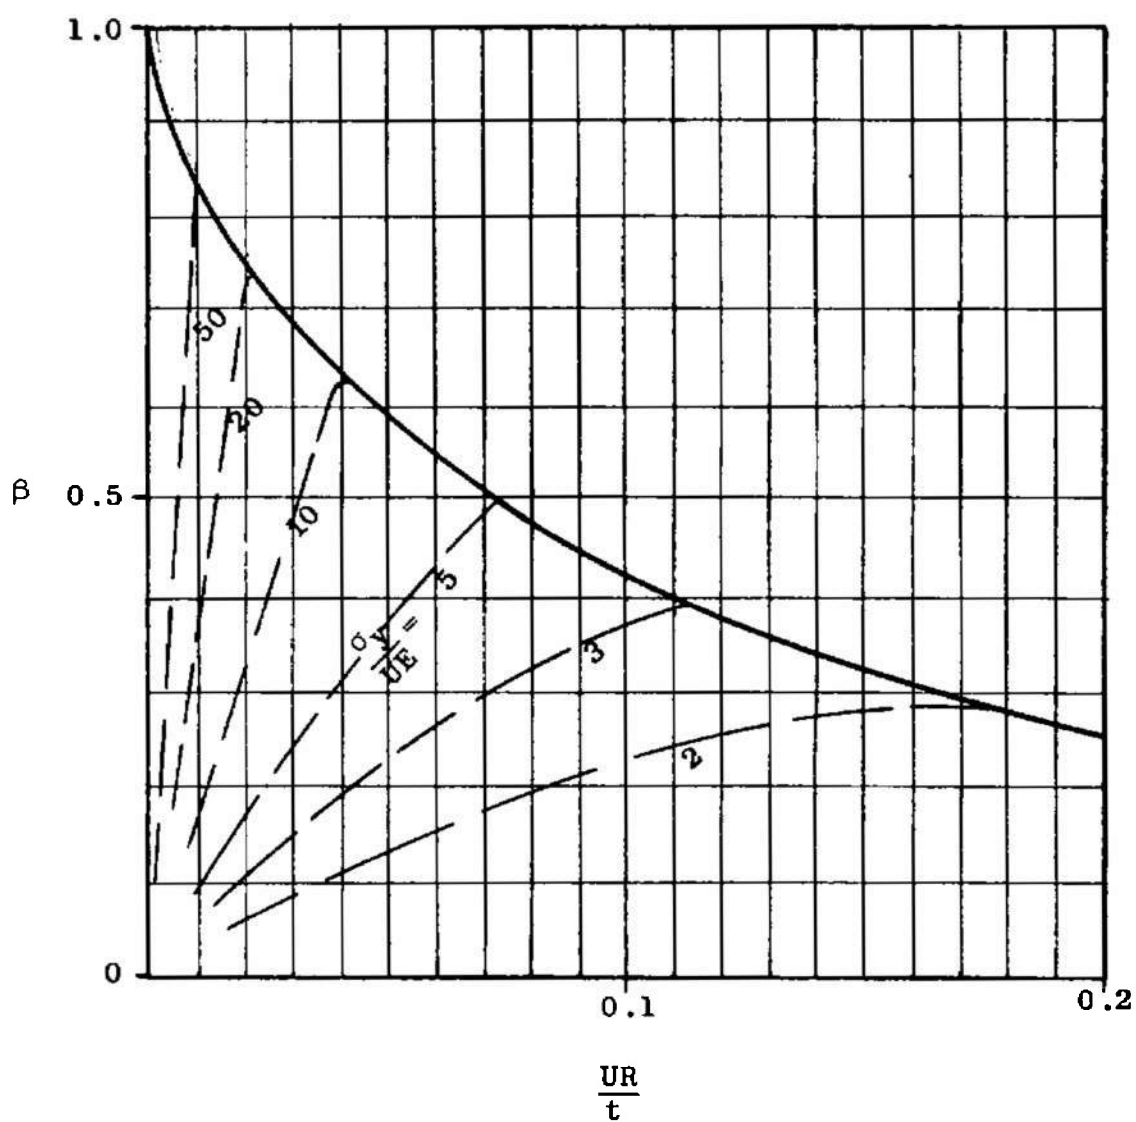


Fig. 2 Coefficient  $\beta$  as a Function of  $\frac{UR}{t}$

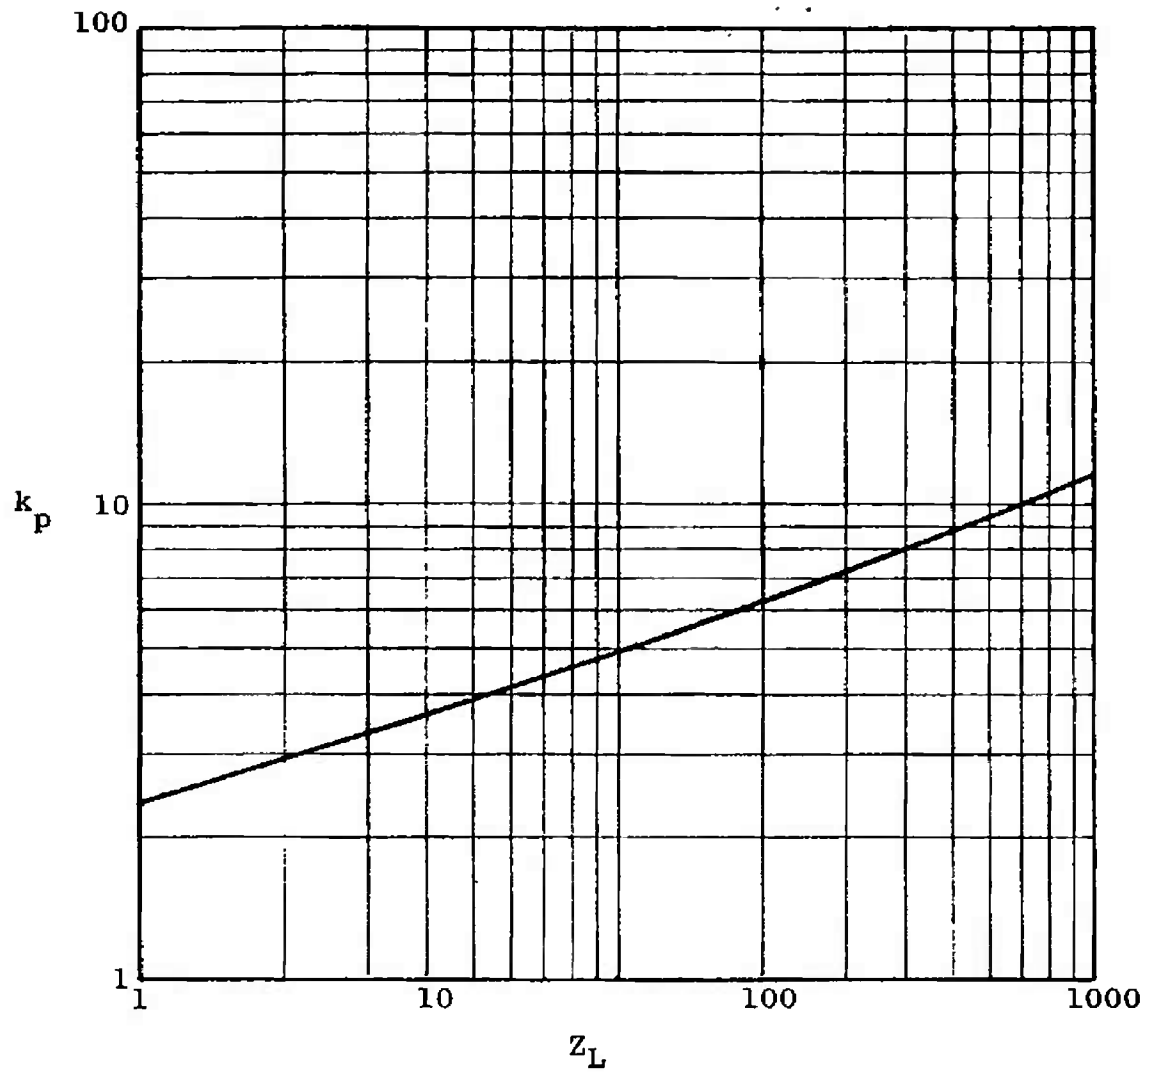


Fig. 3 Coefficient  $k_p$  as a Function of  $Z_L$

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP N/A	
3. REPORT TITLE BUCKLING OF HEADS, CYLINDERS, AND RINGS			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5. AUTHOR(S) (Last name, first name, initial) Buchert, Kenneth P., ARO, Inc.			
6. REPORT DATE December 1966		7a. TOTAL NO. OF PAGES 19	7b. NO. OF REFS 6
8a. CONTRACT OR GRANT NO. AF 40(600)-1200		9a. ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-66-224	
b. PROJECT NO. c. Program Element 65402234 d.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) N/A	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.			
11. SUPPLEMENTARY NOTES Available in DDC		12. SPONSORING MILITARY ACTIVITY Arnold Engineering Development Center Air Force Systems Command (AFSC) Arnold Air Force Station, Tennessee	
13. ABSTRACT <p>The purpose of this report is to briefly review and summarize the research that has been accomplished on the buckling of shells and to develop practical methods of stability analyses that are applicable to large fabricated shell construction. The analyses are applicable to doubly curved shells (i.e., spheres, ellipsoids, dished heads, etc.), to stiffened and unstiffened cylinders, and to rings. Although the methods presented were specifically developed in the analysis of the Mark I - Aerospace Environmental Facility, they may be used to analyze the general class of shells constructed by the "Heavy Plate Fabricators". This general type of shell is fabricated in steel or aluminum, is relatively thick, has a relatively large radius of curvature, and is fabricated generally in accordance with the ASME-Section VIII-Unfired Pressure Vessel Code. Although the loading is basically caused by external pressure, such loadings as temperature variations and concentrated loads and moments are considered. The important effects of fabrication tolerances are also considered in the analyses.</p>			

## KEY WORDS

## LINK A

## LINK B

## LINK C

ROLE

WT

ROLE

WT

ROLE

WT

buckling

1 heads - -

2 cylinders - -

3 rings - -

pressure

temperature

11-10

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.